


Quick Start Guide

For detailed instructions, please refer to the Uninet IColor 550 Printer User Manual and the Uninet IColor® ProRIP User Manual

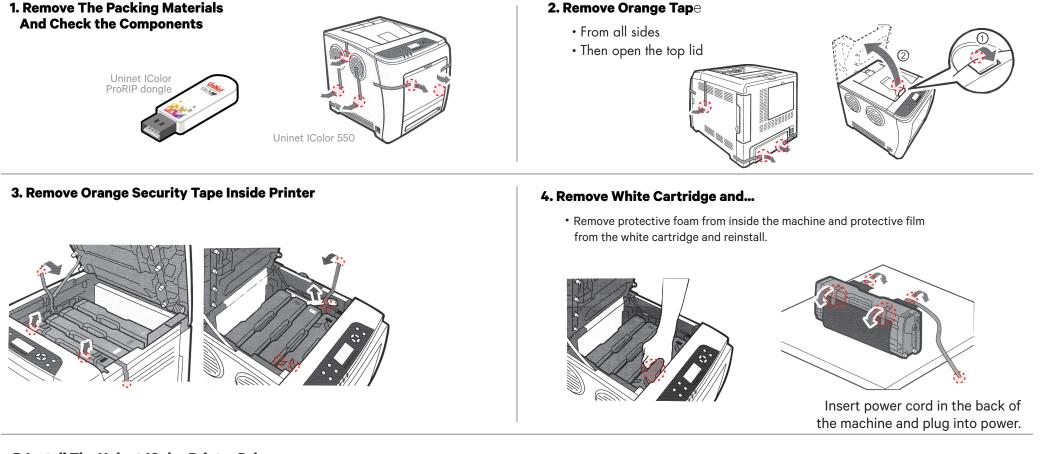

5. Install The Uninet IColor Printer Driver

• Insert the provided USB Flash drive, select "Uninet IColor Software" and follow the install steps and select IColor 550 device

6. The Uninet IColor 550 Digital Color + White Transfer Media Printer Has THREE Configurations To Suit Any Printing Project

These coincide with the 'Print Queues' in the iColor ProRIP (Step 14)



7. Install the Uninet IColor ProRIP (stored on the provided dongle)

• Choose your language and follow the install steps



SetUp

Application Type. Choose either 32-bit or 64-bit application type. To Continue, select Next.

IColor ProRIP Setup

InstallShield Wizard for iColor ProRIP The InstallShield Wizard will install iColor ProRIP on your computer. To Continue, select Next.

IColor ProRIP Setup

License Agreement Please read the following license agreement carefully. If you agree, Accept and select Next.

IColor ProRIP Setup

Installation Choices Choose 'Full install of iColor ProRIP' and select Next.



IColor ProRIP Setup


Choose Destination Location. Select folder where setup will install files. To Continue, select Next.

IColor ProRIP Setup

UniNet

iColor[®] Pro**RIP**

Select Program Folder. Please select a program folder. Setup will add program icons to the Program Folder listed below. You may type a new folder name, or select one from the existing folders list. Select Next to continue.



IColor ProRIP Setup Agree to license terms and select Install.

& Uninet IColor ProRIP Softwa First time Setup	re	9. ProRIP opens, the Queue Wizard will be for your IColor 550 printer	gin the installation of the support files
 Ensure the ProRIP dongle is inserted and you are connected to the internet (required) Launch the software Set unit of measure and decimal places, then 	First Time Setup You are running iColor ProRIP for the first time. Please review initial settings and modify to suit your preferences. Where applicable, all numeric values will be displayed using the selected units and number of decimal places set below.	• Select Next Create Queue Wizard Introduction Welcome to the production queue setup wizard.	Select Install Printer Create Queue Wizard Printer Defaults Assign a default printer for this production queue. Select the default printer, print mode, and output port for this queue:
select OK.	Set display units: Inches 2 Set number of decimal places: 2 To change these settings, and for advanced options, click on 'Tools->Options' after the application begins.	This wizard will set up your local production queue. A production queue manages your print and cut jobs for your configured printers and cutters. To continue, click 'Next', or click 'Cancel' to quit.	Printer:
		Back Next Cancel	Back Next , Cancel

10. Select the IColor 550 printer from the support menu and select 'OK'

Install Printer

Search:

UniNet iColor 550

Select a printer from the list you want iColor ProRIP to supp

11. Device Package Search


X

Clea

OK Cancel


Select 'Search' for new printer package
Select 'Next' to continue the installation

Device Package Sea	arch		
• Search for new pri	inter package(s) from DVD	or Cloud server.	
	erver for printer package(s s required for this search t		
	s required for this search t	o take place	
Search DVD. Please insert Pri	inter DVD supplied with Rip	o Software	
O Don't search autor	matically, I will choose the	search location	
Select this option i		a printer package from a spe	cific location. This
Select this option i	if you would like to select a ay not be the most recent		cific location. This
Select this option i			cific location. This Browse
Select this option i			




12. Select 'Finish' to complete the installation

• Please continue for software configuration




13. Uninet IColor ProRIP Printer Queue Setup

- Open the iColor ProRIP
- Select Queue/Manage Queues
- Select the proper port from the 'Port' drop down menu.
- If connected via network (recommended), choose TCP/IP.



- If connected by USB, choose the printer as identified in the drop down
- * All other ports will update automatically, it is only necessary to do this for one queue
- Select 'Close'



14. Select the proper Print Queue for your project


15. Import + Print Graphic

A. Three ways to import graphics

A. Select your 'Print Que' and 'Print Mode'

- The 'Print Modes' have preset values for white coverage, choke, paper size, paper tray and mirror settings


These can be modified as needed

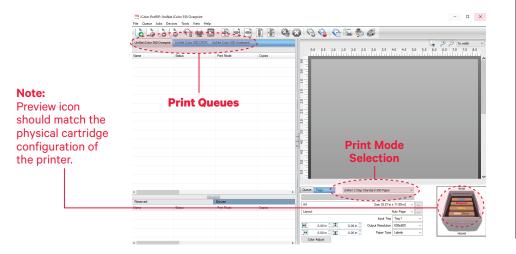

UNINET ICOLOR

 - 1. Select the 'green plus' icon and navigating to the proper folder. C. Select 'Print' icon in the menu bar.

- 2. Select File > Import File
- 3. Simply dragging and dropping your file into the queue

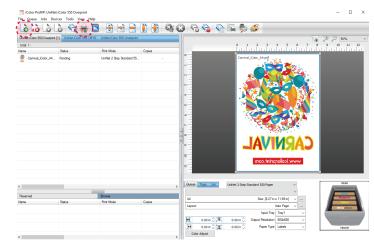

icolorprint.com